


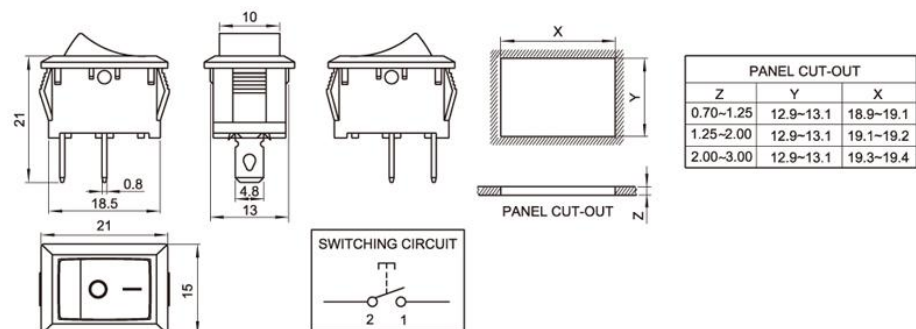

RS601 SERIES

額定電流、電壓 RATING	6A 250VAC 10A 250VAC 6(8)A 250VAC 6A/125A 250VAC 8A/128A 250VAC 6(4)A 250VAC 10A 125VAC
接觸電阻 CONTACT RESISTANCE	≤ 20mΩ
絕緣電阻 INSULATION RESISTANCE	≥ 100MΩ
介電強度 DIELECTRIC INTENSITY	≥ 1800VAC/3S
電器壽命 ELECTRICAL LIFE	≥ 10,000 Cycles

RS601	A	1	01	0	01	1	B	B
系列号 Series	底座类型 Base Type	极 Poles	电路图 circuit diagram	带灯状况 Illuminated	按钮标志 Button Mark	端子规格 Terminal Type	按钮颜色 Actuator Colour	底座颜色 Base Colour
1	A	1 单极 Single Pole	01 ON-OFF	0 不带灯 NO Illuminated	00	1 4.8mm TAB 0.8mm THICK	B 黑色 Black	B 黑色 Black
2	AC	2 双极 Double Pole	02 ON-ON	A 220V 氖灯(绿色) 220V Neon Lamp	01	2 PCB (RIGHTANGLE)	G 绿色 Green	G 绿色 Green
3	B		03 ON-OFF-ON	B 220V 氖灯(蓝色) 220V Neon Lamp	02	3 PCB (RIGHTANGLE)	A 灰色 Gray	A 灰色 Gray
4	C1		04 (ON)-OFF	C 6V 钨丝灯(绿色) 6V Tungsten Bulb	03	4 PCB (RIGHTANGLE)	Y 黄色 Yellow	Y 黄色 Yellow
5	C2		11 ON-OFF	D 12V 钨丝灯(绿色) 12V Tungsten Bulb	04	5 4.8mm TAB 0.8mm THICK	R 红色 Red	R 红色 Red
6	D		12 ON-OFF	E 110V 氖灯(蓝色) 110V Neon Lamp	05	6 PCB (RIGHTANGLE)	W 白色 White	W 白色 White
7	DA			F 24V 钨丝灯(红色) 24V Tungsten Bulb	06	7 PCB (RIGHTANGLE)	L 蓝色 Blue	L 蓝色 Blue
8	D1			I 12V 钨丝灯(红色) 12V Tungsten Bulb	07	8 PCB (RIGHTANGLE)	O 橘黄色 Orange	O 橘黄色 Orange
9	D1A			J 12V LED 灯(绿色) 12V LED Lamp	08	9 PCB (RIGHTANGLE)	P 紫色 Purple	P 紫色 Purple
10	D2			L 220V LED 灯(红色) 220V LED Lamp	09			
11	D1B			M 24V LED 灯(红色) 24V LED Lamp	10			
12	E			N 220V 氖灯(红色) 220V Neon Lamp	11			
13	ES			Q 110V 氖灯(红色) 110V Neon Lamp	12			
14	EB				13			
15	F				14			
16	F1				15			
17	G				16			
18	J				17			
19	K							