


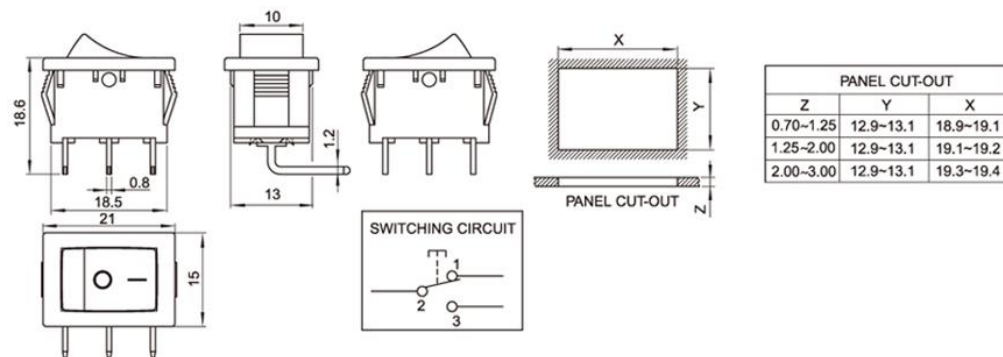

RS601 SERIES

額定電流、電壓 RATING	6A 250VAC	10A 250VAC
	6(8)A 250VAC	6A/125A 250VAC
	8A/128A 250VAC	6(4)A 250VAC
	10A 125VAC	
接觸電阻 CONTACT RESISTANCE	$\leq 20\text{m}\Omega$	
絕緣電阻 INSULATION RESISTANCE	$\geq 100\text{M}\Omega$	
介電強度 DIELECTRIC INTENSITY	$\geq 1800\text{VAC}/3\text{S}$	
電器壽命 ELECTRICAL LIFE	$\geq 10,000$ Cycles	

RS601	A	1	01	0	01	1	B	B
系列号 Series	底座类型 Base Type	极 Poles	电路图 circuit diagram	带灯状况 Illuminated	按钮标志 Button Mark	端子规格 Terminal Type	按钮颜色 Actuator Colour	底座颜色 Base Colour
00	A	1 单极 Single Pole	01 ON-OFF	0 不带灯 NO Illuminated	00	1 4.8mm TAB 0.8mm THICK	B 黑色 Black	B 黑色 Black
01	AC	2 双极 Double Pole	02 ON-ON	A 220V 氖灯(绿色) 220V Neon Lamp	01	2 PCB (RIGHTANGLE)	G 绿色 Green	G 绿色 Green
02	B		03 ON-OFF-ON	B 220V 氖灯(蓝色) 220V Neon Lamp	02	3 PCB (RIGHTANGLE)	A 灰色 Gray	A 灰色 Gray
03	C		04 (ON)-OFF	C 6V 钨丝灯(绿色) 6V Tungsten Bulb	03	4 PCB (RIGHTANGLE)	Y 黄色 Yellow	Y 黄色 Yellow
04	D		11 ON-OFF	D 12V 钨丝灯(绿色) 12V Tungsten Bulb	04	6 4.8mm TAB 0.8mm THICK	R 红色 Red	R 红色 Red
05	E		12 ON-OFF	E 110V 氖灯(蓝色) 110V Neon Lamp	05	7 PCB (RIGHTANGLE)	W 白色 White	W 白色 White
06	F			F 24V 钨丝灯(红色) 24V Tungsten Bulb	06	8 PCB (RIGHTANGLE)	L 蓝色 Blue	L 蓝色 Blue
07	G			G 12V 钨丝灯(红色) 12V Tungsten Bulb	07	9 PCB (RIGHTANGLE)	O 橘黄色 Orange	O 橘黄色 Orange
08	H			H 12V LED 灯(绿色) 12V LED Lamp	08		P 紫色 Purple	P 紫色 Purple
09	I			I 220V LED 灯(红色) 220V LED Lamp	09			
10	J			J 24V LED 灯(红色) 24V LED Lamp	10			
11	K			K 220V 氖灯(红色) 220V Neon Lamp	11			
12	L			L 110V 氖灯(红色) 110V Neon Lamp	12			
13	M				13			
14	N				14			
15	O				15			
16	P				16			
17	Q				17			