


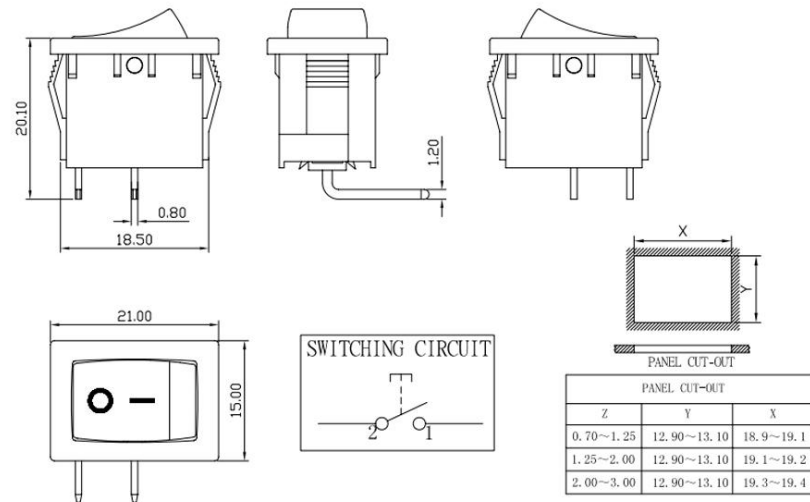

RS601 SERIES

額定電流、電壓 RATING	6A 250VAC 10A 250VAC 6(8)A 250VAC 6A/125A 250VAC 8A/128A 250VAC 6(4)A 250VAC 10A 125VAC
接觸電阻 CONTACT RESISTANCE	≤ 20mΩ
絕緣電阻 INSULATION RESISTANCE	≥ 100MΩ
介電強度 DIELECTRIC INTENSITY	≥ 1800VAC/3S
電器壽命 ELECTRICAL LIFE	≥ 10,000 Cycles

RS601	A	1	01	0	01	1	B	B
系列号 Series	底座类型 Base Type	极 Poles	电路图 circuit diagram	带灯状况 Illuminated	按钮标志 Button Mark	端子规格 Terminal Type	按钮颜色 Actuator Colour	底座颜色 Base Colour
Base	A	1 Single Pole	01 ON-OFF	0 不带灯 NO Illuminated	01 ○ —	1 4.8mm TAB 0.8mm THICK	B 黑色 Black	B 黑色 Black
AC	AH	2 Double Pole	02 ON-ON	A 220V 氖灯 (绿色) 220V Neon Lamp	02 3 3	2 PCB (RIGHTANGLE)	G 绿色 Green	G 绿色 Green
B	C		03 ON-OFF-ON	B 220V 氖灯 (蓝色) 220V Neon Lamp	03 ○ I	3 PCB (RIGHTANGLE)	A 灰色 Gray	A 灰色 Gray
C1	C2		04 ON-OFF	C 6V 钨丝灯 (绿色) 6V Tungsten Bulb	04 I OH	4 PCB (RIGHTANGLE)	Y 黄色 Yellow	Y 黄色 Yellow
D	D1		11 ON-OFF	D 12V 钨丝灯 (绿色) 12V Tungsten Bulb	05 *	5 4.8mm TAB 0.8mm THICK	R 红色 Red	R 红色 Red
D1B	D1A		12 ON-OFF	E 110V 氖灯 (蓝色) 110V Neon Lamp	06 —	6 4.8mm TAB 0.8mm THICK	W 白色 White	W 白色 White
E	E1			F 24V 钨丝灯 (红色) 24V Tungsten Bulb	07 I	7 PCB (RIGHTANGLE)	L 蓝色 Blue	L 蓝色 Blue
F	F1			I 12V 钨丝灯 (红色) 12V Tungsten Bulb	08 3 3	8 PCB (RIGHTANGLE)	O 橘黄色 Orange	O 橘黄色 Orange
J	J1			J 12V LED灯 (绿色) 12V LED Lamp	09 — ○	9 PCB (RIGHTANGLE)	P 紫色 Purple	P 紫色 Purple
				K 220V LED灯 (红色) 220V LED Lamp	10 11 —			
				L 220V LED灯 (红色) 220V LED Lamp	11 —			
				M 24V LED灯 (红色) 24V LED Lamp	12 4 ▶			
				N 220V 氖灯 (红色) 220V Neon Lamp	13 •			
				Q 110V 氖灯 (红色) 110V Neon Lamp	14 3			
					15			
					16			
					17 ○			