


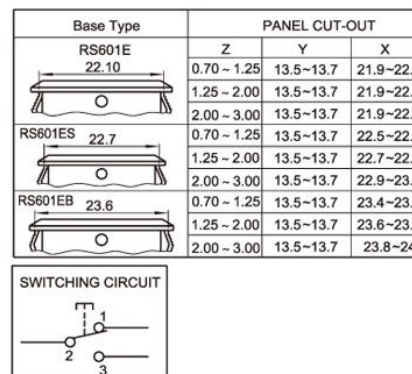

額定電流、電壓 RATING

6A 250VAC 10A 250VAC
6(8)A 250VAC 6A/125A 250VAC
8A/128A 250VAC 6(4)A 250VAC
10A 125VAC

接觸電阻 CONTACT RESISTANCE	≤ 20mΩ
-------------------------	--------

絕緣電阻 INSULATION RESISTANCE $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY $\geq 1800\text{VAC}/3\text{S}$

電器壽命 ELECTRICAL LIFE $\geq 10,000$ Cycles

RS601	A	1	01	0	01	1	B	B
系列号 Series	底座类型 Base Type	极数 Poles	电路图 circuit diagram	带灯状况 Illuminated	按钮标志 Button Mark	端子规格 Terminal Type	按钮颜色 Actuator Colour	底座颜色 Base Colour
See	A	1 Single Pole	01 ON-OFF 	0 不带灯 NO illuminated	00	1 4.8mm TAB 0.8mm THICK 	B 黑色 Black	B 黑色 Black
AC	AH 11.7	2 双极 Double Pole	02 ON-ON 	A 220V 氖灯(绿色) 220V Neon Lamp	01 ○ —	2 PCB (RIGHTANGLE) 	G 绿色 Green	G 绿色 Green
B	C		03 ON-OFF-ON 	B 220V 氖灯(蓝色) 220V Neon Lamp	02	3 PCB (RIGHTANGLE) 	A 灰色 Gray	A 灰色 Gray
C1	C2		04 (ON)-OFF 	C 6V 钨丝灯(绿色) 6V Tungsten Bulb	03 ○ I	4 PCB (RIGHTANGLE) 	Y 黄色 Yellow	Y 黄色 Yellow
C3	D		04 (ON)-OFF 	D 12V 钨丝灯(绿色) 12V Tungsten Bulb	04 I O II	6 4.8mm TAB 0.8mm THICK 	R 红色 Red	R 红色 Red
DA	DA1A		11 ON-OFF 	E 110V 氖灯(蓝色) 110V Neon Lamp	05 —	7 PCB (RIGHTANGLE) 	W 白色 White	W 白色 White
D1	D2		12 ON-OFF 	F 24V 钨丝灯(红色) 24V Tungsten Bulb	06 —	8 PCB (RIGHTANGLE) 	L 蓝色 Blue	L 蓝色 Blue
D1B	D1			I 12V 钨丝灯(红色) 12V Tungsten Bulb	07 I	9 PCB (RIGHTANGLE) 	O 橘黄色 Orange	O 橘黄色 Orange
D2	D2			J 12V LED 灯(绿色) 12V LED Lamp	08 OFF		P 紫色 Purple	P 紫色 Purple
E	ES 12.2			L 220V LED 灯(红色) 220V LED Lamp	09 — ○			
F	F1			M 24V LED 灯(红色) 24V LED Lamp	10			
G	G			N 220V 氖灯(红色) 220V Neon Lamp	11 = —			
J	K			Q 110V 氖灯(红色) 110V Neon Lamp	12			
					13 ●			
					14			
					15			
					16			
					17 ○			