


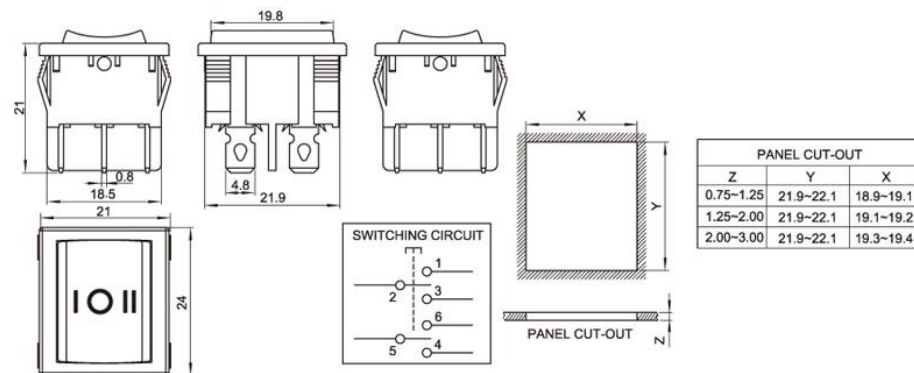

RS601 SERIES

額定電流、電壓 RATING	6A 250VAC 10A 250VAC 6(8)A 250VAC 6A/125A 250VAC 8A/128A 250VAC 6(4)A 250VAC 10A 125VAC
接觸電阻 CONTACT RESISTANCE	≤ 20mΩ
絕緣電阻 INSULATION RESISTANCE	≥ 100MΩ
介電強度 DIELECTRIC INTENSITY	≥ 1800VAC/3S
電器壽命 ELECTRICAL LIFE	≥ 10,000 Cycles

RS601 系列号 Series	A 基座类型 Base Type	1 极 Poles	01 电路图 circuit diagram	0 带灯状况 Illuminated	01 按钮标志 Button Mark	1 端子规格 Terminal Type	B 按钮颜色 Actuator Colour	B 基座颜色 Base Colour
1	A	1 单极 Single Pole	01 ON-OFF	0 不带灯 NO Illuminated	00	1 4.8mm TAB 0.8mm THICK	B 黑色 Black	B 黑色 Black
2	AH	2 双极 Double Pole	02 ON-ON	A 220V 氖灯(绿色) 220V Neon Lamp	01 0 -	2 PCB (RIGHTANGLE)	G 绿色 Green	G 绿色 Green
3	B		03 ON-OFF-ON	B 220V 氖灯(蓝色) 220V Neon Lamp	02 1 0 2	3 PCB (RIGHTANGLE)	A 灰色 Gray	A 灰色 Gray
4	C		04 (ON)-OFF	C 6V 钨丝灯(绿色) 6V Tungsten Bulb	03 0 1	4 PCB (RIGHTANGLE)	Y 黄色 Yellow	Y 黄色 Yellow
5	C1		11 ON-OFF	D 12V 钨丝灯(绿色) 12V Tungsten Bulb	04 1 0 1 1	5 4.8mm TAB 0.8mm THICK	R 红色 Red	R 红色 Red
6	D		12 ON-OFF	E 110V 氖灯(蓝色) 110V Neon Lamp	05 -	6 4.8mm TAB 0.8mm THICK	W 白色 White	W 白色 White
7	D1			F 24V 钨丝灯(红色) 24V Tungsten Bulb	06 -	7 PCB (RIGHTANGLE)	L 蓝色 Blue	L 蓝色 Blue
8	D1A			I 12V LED灯(绿色) 12V LED Lamp	07 1	8 PCB (RIGHTANGLE)	O 橘黄色 Orange	O 橘黄色 Orange
9	D1B			J 220V LED灯(红色) 220V LED Lamp	08 OFF 0	9 PCB (RIGHTANGLE)	P 紫色 Purple	P 紫色 Purple
10	E			L 220V LED灯(红色) 220V LED Lamp	09 1 0			
11	ES			M 220V LED灯(红色) 220V LED Lamp	10 0 1 0			
12	EB			N 110V 氖灯(红色) 110V Neon Lamp	11 - -			
13	F			Q 110V 氖灯(红色) 110V Neon Lamp	12 1 1			
14	F1				13 -			
15	G				14 0			
16	J				15 0			
17	K				16 0			